




- Chemical vapors elimination by filtration
- Extracting connection not required
- Adaptable to a wide range of safety cabinets
- Laboratory environment purification 24h/24
- Standalone technology, installation fast and simple
- Filters replacement: every 12 months

**Technical data**

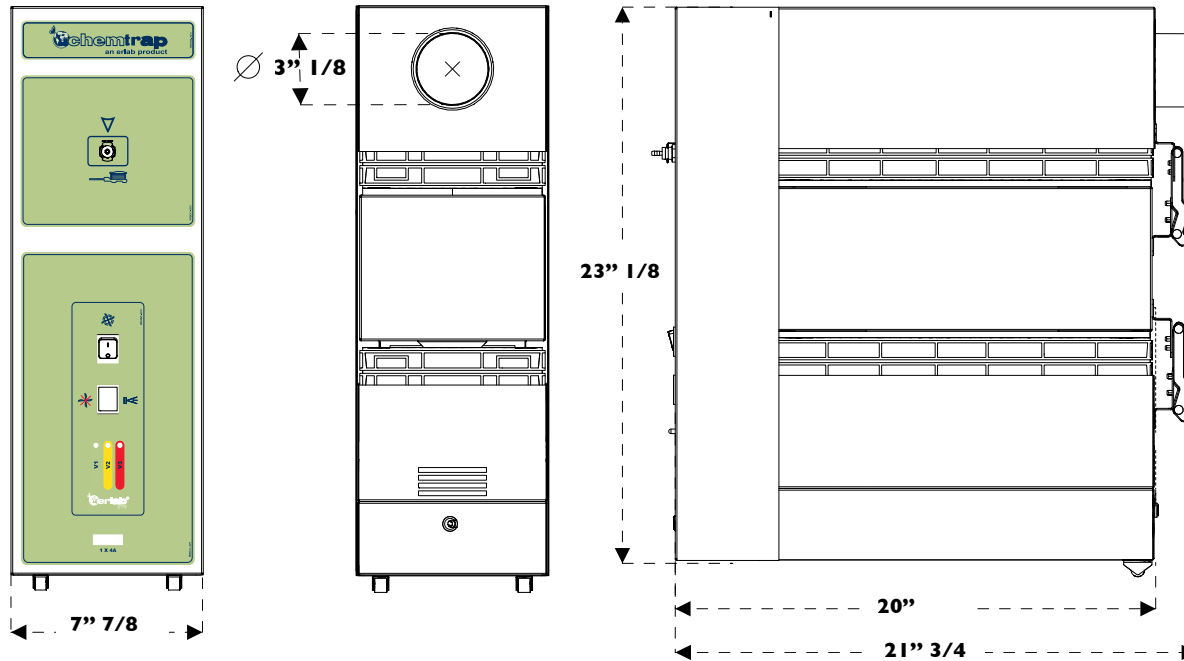

Characteristics	
Number of filters	2
Number of fans	1
Air flow	> 29,4 CFM
Voltage	230V / 50 Hz
Electric power	19 Watts
Absorbed intensity	0,1 amp.
Flexible duct connection	39" 3/8 (Ø 3" 1/8 mm)
Flexible connecting flange	Ø 2" 15/16 - 3" 1/8 - 2" 15/16

Structure	
Metallic parts	Anti-corrosion steel coated with 100% polyester
Filtration module	Injected polypropylene
Duct connection	PVC

**Types of filters available**

AS	For storage with organic vapors mainly
BE	For storage with organic vapors and acids mainly
HP	HEPA H14 for powders storing

**Versions/ Equipment**

01	02	03	04
Sampling probe	Sampling probe + Fan failure	Sampling probe + Fan failure + Securifilter	Sampling probe + Securifilter

**Sampling probe**  
for filter saturation test

**Fan Failure**  
Alarm used to monitor proper functioning of the ventilation system

**Securifilter®**  
Electronic alarm to detect filter saturation by solvents